


ELK CROSS

**TRINCIAERBA / TRINCIASARMENTI /
TRINCIAFOSSI PER TRATTORI
DA 30 A 60 CV**

**REAR PRUNING & OFFSET FLAIL
MOWER FOR TRACTORS
FROM 30 TO 60 HP**

VIDEO 

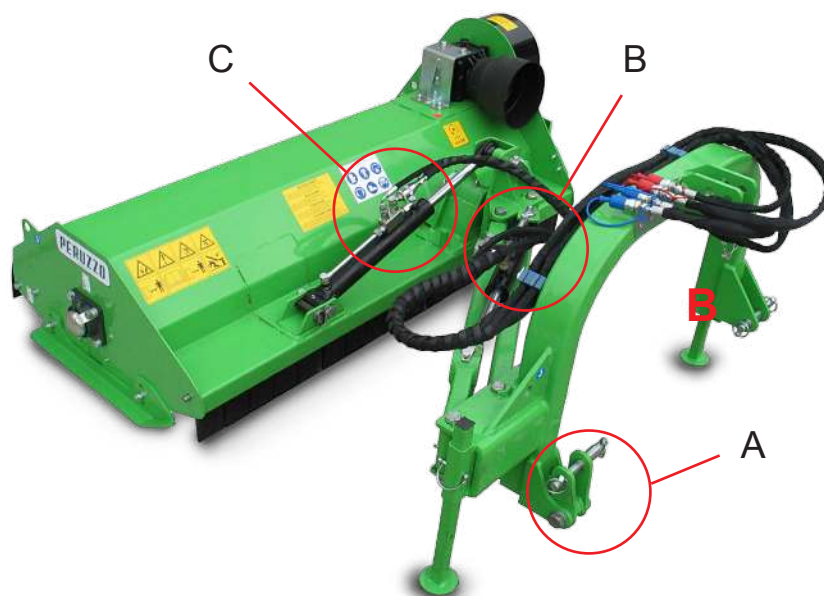

Caratteristiche

- Trinciafossi posteriore al trattore.
- Per trattori da 30 a 60 CV.
- Per manutenzione comunale, stradale, Parchi fotovoltaici e superfici agricole.
- Adatta per taglio erba su argini e fossi fino a 150cm di altezza.
- Ottima qualità di taglio e triturazione.
- Triturazione rami fino a 4cm di diametro.
- Di facile utilizzo su varie pendenze o taglio siepi.
- (A) Con sistema di sicurezza antishock su attacco a 3 punti e (B/C) valvole idrauliche antiurto (C) regolatore di flusso.
- Moltiplicatore con ruota libera.

Features

- Ditch mower for rear tractor fitting.
- For 30 to 60 HP tractors use.
- For municipal, roadside maintenance, photovoltaic parks, and agricultural fields.
- Suitable for cutting grass on embankments and ditches up to 150 cm in height.
- Excellent cutting and shredding quality.
- Shredding branches up to 4 cm in diameter.
- Easy to use on various slopes or for hedge trimming.
- (A) With anti-shock safety system on 3-point hitch and (B/C) hydraulic shock valves and (C) oil flow adjuster.
- Gearbox with overrun clutch.



MODELLO MODEL		 (MIN - MAX)		
	(MM)	(HP)	(KW)	(0,6 KG)
ELK CROSS 1200	1165	30 - 40	22 - 30	16
ELK CROSS 1400	1355	35 - 45	26 - 33,5	18
ELK CROSS 1600	1475	40 - 55	30 - 41	20
ELK CROSS 1800	1806	50 - 60	37 - 45	24




COMPONENTI TECNICHE DI SERIE TECHNICAL COMPONENTS STANDARD



Rullo + raschiarullo.
Roller + scraper.



Lama mulching
Mulching blade.

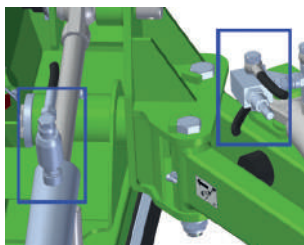

Valvole antishock cilindr.
Antishock cylinder valves.



Snodo Sicurezza 3° punto.
Safety joint on 3 point hitch.

LAME STANDARD INCLUDED BLADES




Mazza in acciaio forgiato e temperato di 0,6Kg.
Forged steel and hardened heavy hammer of 0,6Kg.



MISURE SPOSTAMENTO IN FASE DI LAVORO DISPLACEMENT MEASURES DURING WORK


MODELLO MODEL	A mm	B mm	C mm	D mm	E mm
ELK CROSS 1200	930	590	1490	1600	1865
ELK CROSS 1400	930	740	1670	1600	2045
ELK CROSS 1600	930	860	1790	1600	2165
ELK CROSS 1800	930	1188	2140	1600	2495

SU RICHIESTA ON REQUEST

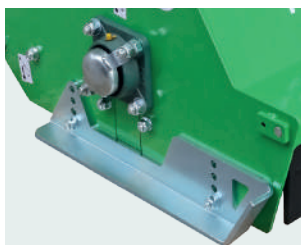

Slitte laterali.
Side skids.

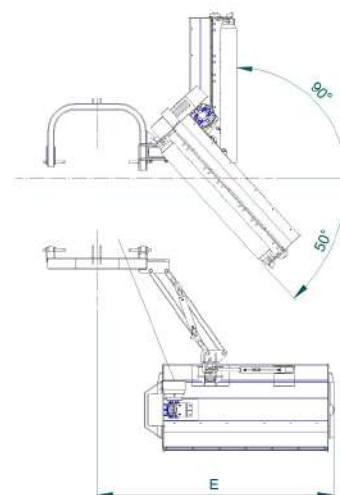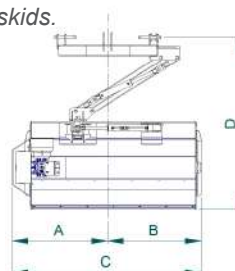

MODELLO MODEL	 (MM)	 (KG)	 (RPM)	 (LxPxH)	 (LxPxH)
ELK CROSS 1200	20 - 75	354	540	1655 x 1600 x 845	1500 x 900 x 1800
ELK CROSS 1400	20 - 75	372	540	1690 x 1600 x 845	1700 x 900 x 1800
ELK CROSS 1600	20 - 75	390	540	1810 x 1600 x 845	1800 x 900 x 1800
ELK CROSS 1800	20 - 75	450	540	2140 x 1600 x 845	2200 x 1100 x 900